

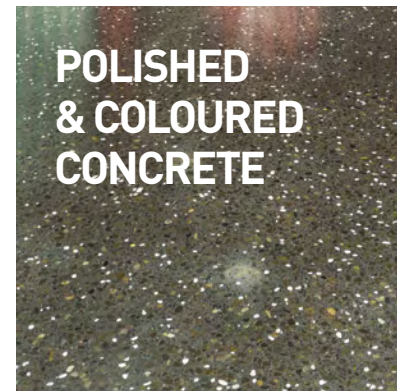


**NEW**

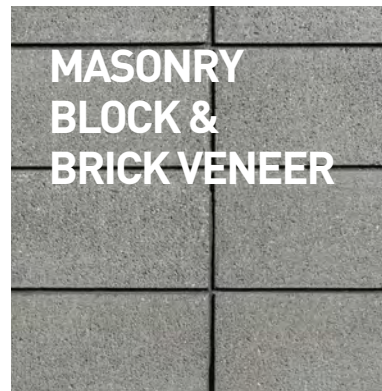

# SEAL + PROTECT

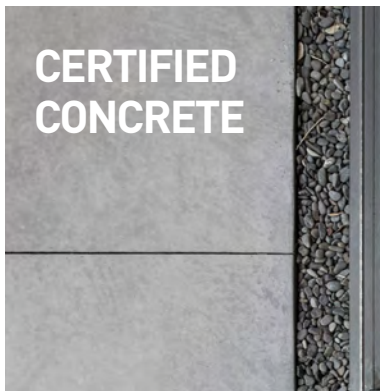

**MAKING IT EASY**

# DRICON® MOISTURE REPELLENT (MR)

A DEEP PENETRATING, GENERAL PURPOSE WATER REPELLENT FOR CONCRETE & MASONRY SURFACES

## USE ON:

- + New & existing concrete
- + Foundations
- + Driveways
- + Concrete pavers
- + Masonry products
- + Polished concrete
- + Concrete bench tops
- + Coloured concrete
- + Pre-cast / tilt-up


## ADVANTAGES:

- + Reduces water intake
- + Makes cleaning easier and quicker
- + Minimises efflorescence
- + Non-staining
- + Easy to apply (spray pack, spray gun)
- + Densifies concrete
- + Allows concrete and masonry products to breathe
- + Suitable for vertical and horizontal surfaces
- + Internal & external use
- + Inhibits mould & mildew growth

## FINISH:

- + Clear, natural with minimal change to the appearance of the surface being treated

## HOW TO USE:

- 1** Clean the surface to be treated with an appropriate product to remove moss & algae growth if required.
- 2**  Clean the area with Dricon® Concrete Treatment to prepare the surface for sealing, rinse thoroughly and let the area dry completely.
- 3** Apply Moisture Repellent in two flood coats by low pressure spray direct from the can and without thinning. (Allow a minimum of 2 hours between coats.)



**SIZES AVAILABLE 5L & 20L**

For larger sizes please contact your local Dricon® representative.

**YIELD → 1 LITRE PER 3-5m<sup>2</sup> (PER COAT)  
DEPENDING ON CONCRETE DENSITY**

## LIFE SPAN / MAINTENANCE

This will depend on the density of the concrete and finish of the surface that Moisture Repellent is applied to. The majority of Moisture Repellent will permanently stay in the concrete, where as on the surface it will weather off over time, or wear on trafficable surfaces.

Apply a maintenance application once every 5 years on horizontal surfaces and once every 8 years on vertical surfaces.

**PLEASE NOTE:** Moisture Repellent is not compliant with CCANZ CP01:2014 Code of Practice for weathertight concrete and concrete masonry construction



# DRICON® SEMI GLOSS SEALER (SG)

A LOW ODOUR TURPENTINE BASED SEMI GLOSS SEALER THAT WILL ENHANCE THE NATURAL COLOUR OF CONCRETE & MASONRY SURFACES

## USE ON:

- + New & existing concrete
- + Foundations
- + Driveways
- + Concrete pavers
- + Masonry products
- + Polished concrete
- + Concrete bench tops
- + Coloured concretes
- + Pre-cast / tilt-up


## ADVANTAGES:

- + Will enhance the colour of your concrete or masonry surface
- + Low-odour turps base
- + Easy to apply (brush, broom, roller, spray pack, spray gun)
- + Internal and external use
- + Slow drying
- + Allows concrete and masonry products to breathe
- + Minimal effect on slip resistance (test results available)

## FINISH:

- + Semi-gloss surface coating

## HOW TO USE:

- 1** Clean the surface to be treated with an appropriate product to remove moss & algae growth if required.
- 2**  Clean the area with Dricon® Concrete Treatment to prepare the surface for sealing, rinse thoroughly and let the area dry completely. If also using Moisture Repellent, do so now as per Moisture Repellent instructions before applying Semi Gloss Sealer.
- 3** Apply Semi Gloss Sealer with either a brush, broom, roller, spray pack or spray gun.
- 4** First coat will normally dry within 1-2 hours. Once the first coat is dry apply a second.
- 5** Clean all equipment with Turpentine.



### SIZES AVAILABLE 5L & 20L

For larger sizes please contact your local Dricon® representative.

**YIELD → 1 LITRE PER 4-6m<sup>2</sup> (PER COAT)  
DEPENDENT ON CONCRETE DENSITY**

## LIFE SPAN / MAINTENANCE

This will depend on the density of the concrete and finish of the surface that Semi Gloss Sealer is applied to. Some Semi Gloss Sealer will permanently stay in the concrete, where on the surface it will weather off over time or wear on trafficable surfaces.










Semi Gloss Sealer can be applied at any stage to maintain a desired finish. Wash the area to be treated with a mild detergent and rinse. Once the surface is dry, apply two applications of Semi Gloss Sealer in accordance with all installation instructions.

**PLEASE NOTE:** Semi Gloss Sealer is not compliant with CCANZ CP01:2014 Code of Practice for weathertight concrete and concrete masonry construction

**0800 374 266**

[www.dricon.co.nz](http://www.dricon.co.nz)

# 3 STEP GUIDE TO CLEANING & SEALING CONCRETE

PRODUCT	FINISH		RECOMMENDED PRODUCTS		
	NATURAL	SEMI-GLOSS	1 	2 	3 
 FIRTH CLASSIC PAVING	✓		•	•	
		✓	•	•	•
 FIRTH DESIGNER PAVING	✓		•	•	
		✓	•	•	•
 WET & PRE CAST CONCRETE PAVING	✓		•	•	
		✓	•	•	•
 CERTIFIED® CONCRETE	✓		•	•	
		✓	•	•	•
 CONCRETE BLOCK (FAIRFACED & HONED)	✓		•	•	
		✓	•	•	•
 CONCRETE BRICK VENEER (FAIRFACED & HONED)	✓		•	•	
		✓	•	•	•



DRICON® CONCRETE TREATMENT  
SIZES: 1L / 5L / 20L



DRICON® MOISTURE REPELLENT  
SIZES: 5L / 20L



DRICON® SEMI GLOSS SEALER  
SIZES: 5L / 20L



ESSENTIAL



OPTIONAL  
FOR BETTER  
FINISH/PERFORMANCE



0800 374 266

www.dricon.co.nz